

Kit Reference: TYK2227

TYK2227 Applications

EXEDY kit reference TYK2227 fits 5 speed manual vehicles only.

If the vehicle is fitted with a semi-automatic gearbox; EXEDY kit reference TYK2253 must be fitted.

TYK2227 Installation

When fitting TYK2227 please ensure that the following is carried out:

- The bell housing is thoroughly cleaned, free from all grease, dirt and old friction fibres from the previous clutch.
- Pay close attention to the cleanliness of the first motion shaft/input shaft.
- A service bulletin has been issued by the vehicle manufacturers to highlight that the design of the clutch fork has been improved to prevent issues with heavy clutch operation and release lever damage; therefore, if stress fractures are found on the clutch lever replace both lever and fork.
- Ensure that the bearing clip sits correctly in the grooves on the release fork:



Fig 1

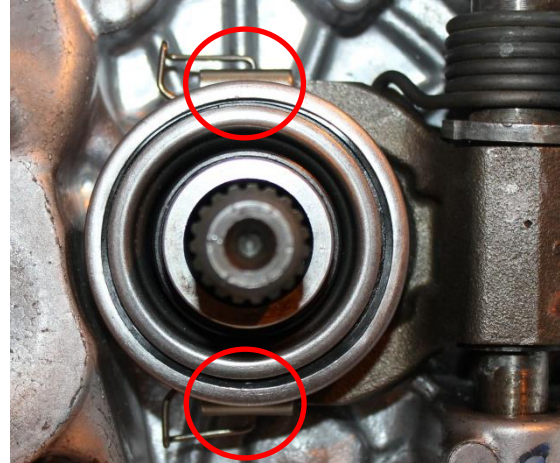


Fig 2

- Figure one shows the locating grooves that the clip must fit in.
- Figure two shows the bearing fitted with the clip locked in place on the release fork.
- Only use grease supplied by EXEDY with this product.

Revised: 01/08/2013 SGC

EXEDY Clutch Europe Ltd
Unit 2, Rokeby Court, Runcorn, Cheshire, WA7 1RW
Tel: +44 (0) 1928 571850 Fax +44 (0) 1928 571852 E-mail: technical@exedy.co.uk
©EXEDY Clutch Europe Ltd | www.exedy.co.uk